

 **GOLDSIONE 金仕达塑胶**
GOLDSIONE — PVC&Rubber Hose Expert 软管行业专家



潍坊金仕达塑胶制品有限公司
GOLDSIONE GROUP LIMITED

公司简介 | COMPANY PROFILE

潍坊金仕达塑胶制品有限公司专业致力于PVC塑料软管制品及胶管制品的研发生产与销售，包括塑料机械设备的制造与销售。我公司从事塑料软管行业至今已有20余年，拥有丰富的塑料软管和塑料机械的行业知识和生产经验，可为用户提供全系列产品和服务。

我公司技术力量雄厚，有独立的研发创新能力，并设有专门的可进行各种软管测试的实验室，全方位确保产品质量。我司产品通过了质量、环境和职业健康安全三体系认证，用于食品行业的产品，依照美国食品药品监督管理局（FDA）规则，由瑞士通用公证行（SGS）检验，符合与食品接触的行业规定，可以根据客户的需求设计和定制产品，满足客户的多元化需求。

我司产品出口到中东，亚洲，欧洲等超过35个国家和地区，公司有专门的质量控制体系，从原料开始到生产成品全程监测，我们有信心成为你可靠的合作伙伴。

Goldsione Group Ltd. specializes in the research, development, production and marketing the PVC hose and Rubber hose, including the manufacturing and sales of PVC hose machinery and equipment. And we have more than 20 years of production experience in this field.

Our company has passed ISO, FDA, SGS standard certification, and can thereby ensure quality and reliability for every customer. We do OEM and ODM productions, so we are confident of being able to meet all buyers' requirements. Furthermore, we guarantee timely delivery and good quality products at low cost, excellent and satisfied service to our customers. Currently, our products are being exported to Asia, Middle East, African, Europe, more than 35 countries.

Please contact us if you are looking for a trust worthy source of said products. We are looking forward to your sincere cooperation and participation.



目 录

Contents

PVC软管 PVC HOSE

PVC 气尿管	1
PVC AIR HOSE	
PVC 水龙带	3
PVC LAY FLAT HOSE	
PVC透明流体管	6
PVC TRANSPARENT SOFT HOSE	
PVC 花园管	7
PVC GARDEN HOSE	
PVC纤维增强管	9
PVC FIBER REINFORCED HOSE	
PVC 钢丝管	11
PVC STEEL WIRE HOSE	
PVC 塑筋管	13
PVC SUCTION HOSE	

橡胶管 RUBBER HOSE

埋吸管	17
RUBBER SUCTION HOSE	
橡胶空气管/水管/砂管/暖风管/双联管	19
RUBBER AIR/WATER/SANDBLAST/HEATER/WELDING HOSE	

塑料机械 HOSE MACHINE

PVC 一步法水带生产线	20
PVC LAY FLAT HOSE PRODUCTION LINE	
PVC纤维增强软管生产线	21
PVC FIBER REINFORCED HOSE PRODUCTION LINE	
PVC塑筋管生产线	22
PVC SUCTION HOSE PRODUCTION LINE	
PVC钢丝管生产设备	23
PVC STEEL WIRE HOSE PRODUCTION LINE	
PVC造粒机	24
PVC GRANULATING PRODUCTION LINE	

PVC气压管 PVC AIR HOSE

产品概述

- 1、产品使用优质PVC原料制造，并采用高强度涤纶线加强，软管管体轻盈，灵活耐用，抗压强，耐腐蚀，不易爆破。
- 2、根据工作压力，我们的产品分为常规压力（三层）和高压（五层）两种，我们还有PVC和橡胶合成的气压管以及双联管等产品。
- 3、所有的产品可为用户安装美式和德式及其他标准的各种接头，方便客户使用。



INTRODUCTION

1. The product is made of high-quality PVC raw materials, and reinforced by high-strength polyester thread. the hose body is light, flexible and durable, strong pressure resistance, corrosion-resistant, and not easy to burst.
2. According to the working pressure, our products are divided into two types: conventional pressure (three layers) and high pressure (five layer). We also have PVC and Rubber synthetic air pressure hose, as well as PVC oxygen and acetylene hose and other products
3. All products can be installed by users according to various fittings of American(NPT) and German and other standards, which is convenient for customers to use.

用途:

被广泛应用于气动工具，气体冲洗装置，压缩机以及发动机配件，机械维修及土木工程设备。

APPLICATIONS

It is widely used in pneumatic tools, gas flushing devices, compressor and engine accessories, mechanical maintenance and civil engineering equipment.



常规压力规格表

Economic PVC Air Hose Specification

产品编号 Code	英寸 INCH	内径 I.D.MM	外径 O.D.MM	工作压力 W.P Bar at 23°C	爆破压力 B.P Bar at 23°C	米重 Kg/Mtr
PAH-1	1/4	6.5	12	20	80	0.1
PAH-2	5/16	8.5	14	20	80	0.13
PAH-3	3/8	10	16	20	80	0.16
PAH-4	1/2	13	20	20	75	0.24
PAH-5	5/8	16	25	20	60	0.38
PAH-6	3/4	19	28.5	20	50	0.46
PAH-7	1	25	34.5	15	45	0.94



高压力规格表

High-pressure PVC Air Hose Specification

产品编号 Code	英寸 INCH	内径 I.D.MM	外径 O.D.MM	工作压力 W.P Bar at 23°C	爆破压力 B.P Bar at 23°C	米重 kg/Mtr
PAHH-1	1/4	6.5	13.5	40	160	0.142
PAHH-2	5/16	8.5	15.5	40	150	0.172
PAHH-3	3/8	9.5	16.5	40	120	0.185



PVC水龙带 PVC LAY FLAT HOSE

产品概述

1、选用高强度涤纶线，优质PVC原料。产品具有耐酸耐腐蚀，工作压力高，抗老化，无毒，延伸能力强等特点。

2、产品一次成型，内衬和涂塑工艺一次挤出完成，原料分布更均匀，无晶点，无气孔，内外壁光滑。

3、从压力方面分为经济型，中压力型和高压型；从结构方面分为：一次成型水龙带和双色水龙带。

4、可选配配件：快速接头，布尔接头，双耳接头等各种接头，适用于各种应用场景和压力要求。

工作温度: -10℃-65℃



INTRODUCTION

1. Choosing high-strength polyester fiber, high quality PVC raw material. It has the characteristics of acid and corrosion resistance, high working pressure, anti-aging, non-toxic, strong extension ability and so on.

2. Adopted one-step molding technology, lining and plastic-coated extruded at the same time; the distribution of raw materials is more uniform, no crystal points, no pores, the inner and outer walls are smooth.

3. According to the different working pressure, can be divided into economic type, medium pressure type, and high-pressure type. According to the structure, can be divided into: one-step molding lay flat hose and double-color lay flat hose

4. Optional accessories: Quick connectors, Bauer couplings, double ear connectors, and other connectors, suitable for various application scenarios and pressure requirements.

Working Temperature: -10℃-65℃

应用环境:

适用于农业灌溉和林业喷灌，生产范围从1英寸到12英寸，工作压力从2bar到10bar。

可广泛用于农业、工业、矿业等多种行业。

APPLICATIONS

The PVC lay flat hose is suitable for agricultural irrigation and forestry sprinkler irrigation, production range from 1 inch to 12 inches, working pressure from 2bar to 10bar. It can be widely used in agriculture, industry, mining and other industries.

水龙带-中压规格表

Medium Pressure PVC Lay Flat Hose Specification

产品编号 Item No.	英寸 Inch	内径 I.D. (mm)	米重 weight/meter (g)	工作压力 W.P. (Bar)	爆破压力 B.P. (Bar)
PLFHM001	1-1/2	41	210	5	15
PLFHM002	2	53	280	4	13
PLFHM003	2	52	240	5	16
PLFHM004	2-1/2	65	320	4	14
PLFHM005	2-1/2	66	380	4	12
PLFHM006	2-1/2	65	380	5	16
PLFHM007	3	75	460	4	14
PLFHM008	3	78	460	4	12
PLFHM009	4	102	650	4	12
PLFHM010	4	104	650	4	12
PLFHM011	6	152	1200	4	12
PLFHM012	8	206	1600	3	9
PLFHM013	10	252	2600	3	9
PLFHM014	12	305	3100	4	12



High Tensile Polyester
Yarn Reinforcement



Flexible PVC
Cover

Flexible PVC
Inner Tube

水龙带-高压规格表

High Pressure PVC Lay Flat Hose Specification

产品编号 Item No.	英寸 Inch	内径 I.D. (mm)	米重 weight/meter (g)	工作压力 W.P. (Bar)	爆破压力 B.P. (Bar)	产品编号 Item No.	英寸 Inch	内径 I.D. (mm)	米重 weight/meter (g)	工作压力 W.P. (Bar)	爆破压力 B.P. (Bar)
PLFHH001	3/4	19	140	8	25	PLFHH010	3	75	840	11	35
PLFHH002	1	25	150	8	25	PLFHH011	4	102	900	6	18
PLFHH003	1-1/4	32	170	8	25	PLFHH012	4	102	1120	10	30
PLFHH004	1-1/2	38	200	8	25	PLFHH013	5	125	1400	8	24
PLFHH005	2	52	280	6	20	PLFHH014	6	152	1550	6	18
PLFHH006	2	52	480	10	30	PLFHH015	6	152	1680	7	22
PLFHH007	2-1/2	65	450	8	24	PLFHH016	6	152	2500	10	30
PLFHH008	2-1/2	65	550	10	30	PLFHH017	8	203	2200	6	18
PLFHH009	3	75	600	7	21	PLFHH018	8	203	4000	8	24



水龙带-常规压力规格表

Economic PVC Lay Flat Hose Specification


产品编号 Item No.	英寸 Inch	内径I.D. (mm)	米重 weight/meter (g)	工作压力 W.P. (Bar)	爆破压力 W.P. (Bar)	产品编号 Item No.	英寸 Inch	内径I.D. (mm)	米重 weight/meter (g)	工作压力 W.P. (Bar)	爆破压力 W.P. (Bar)
PLFHE001	1	25	125	3-4	12	PLFHE009	4	102	520	2-3	9
PLFHE002	1-1/4	32	160	3-4	12	PLFHE010	4	102	620	3	10
PLFHE003	1-1/2	38	190	3-4	12	PLFHE011	5	125	800	2-3	11
PLFHE004	2	52	230	3-4	12	PLFHE012	5	128	900	3	9
PLFHE005	2-1/2	65	300	3	12	PLFHE013	6	152	950	2-3	10
PLFHE006	3	75	375	2-3	12	PLFHE014	6	153	1200	3	9
PLFHE007	3	75	400	3	11	PLFHE015	8	203	1600	2-3	12
PLFHE008	3-1/2	90	550	3	11						



双色水龙带-工作压力规格表

Double Color PVC Lay Flat Hose Specification

产品编号 Item No.	英寸 Inch	内径I.D. (mm)	米重 weight/meter (kg)	工作压力 W.P. (Bar)	爆破压力 W.P. (Bar)
PLFHD001	2	50	0.32	4	12
PLFHD002	2	50	0.35	6	18
PLFHD003	3	75	0.45	4	12
PLFHD004	3	75	0.6	6	18
PLFHD005	4	102	0.5	4	12
PLFHD006	4	102	0.85	6	18
PLFHD007	6	152	1.1	4	12
PLFHD008	6	152	1.4	6	18
PLFHD009	8	207	2	4	12

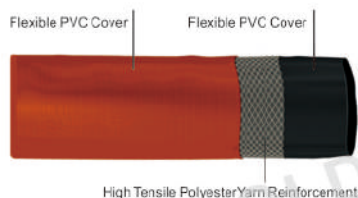

PVC透明流体管 PVC TRANSPARENT SOFT HOSE

产品概述

- 1、产品采用全新PVC原料，PVC单层设计。具有柔韧、耐用、无毒、无异味、耐压性强、耐腐蚀等特点。
- 2、工作温度：-10℃-65℃



INTRODUCTION

1. PVC transparent soft hose using new PVC raw materials, PVC single-layer design. It has the characteristics of flexibility, durability, non-toxic, no odor, strong pressure resistance, corrosion resistance and so on.
2. Working Temperature: -10℃-65℃

产品编号 Item No.	英寸 Inch	内径I.D. (mm)	外径O.D. (mm)	工作压力 W.P Bar at 23℃	爆破压力 B.P Bar at 23℃	长度 length/roll (meter)	米重 weight/meter (kg)
PRSH-1	1/4	6	8	5	15	100	0.029
PRSH-2	5/16	8	10	5	15	100	0.038
PRSH-3	3/8	10	12	5	15	100	0.046
PRSH-4	1/2	12	15	3	9	50	0.086
PRSH-5	5/8	15	18	3	9	50	0.105
PRSH-6	3/4	19	22	3	9	50	0.13
PRSH-7	1	25	30	3	9	50	0.291
PRSH-8	1-1/4	32	38	3	9	40	0.445
PRSH-9	1-1/2	38	44	3	9	40	0.521
PRSH-10	2	50	58	3	9	40	0.916

应用环境:

可用于农业、船舶业、建筑行业、轻工业、及家庭等场所。

APPLICATIONS

It's commonly used in agriculture, shipping industry, construction industry, light industry, and household and other places.



PVC花园管 PVC GARDEN HOSE

产品概述

- 1、PVC花园管采用最新PVC材料，由聚酯纤维层加固而成。具有灵活性，耐用性，重量轻，易于使用，颜色鲜艳亮丽。并选用最新夏季配方，能有效抗紫外线、抗老化。
- 2、花园管可以做成多层；也可采用钩编方式做成钩编管，能有效抗扭曲。
- 3、可以配套连接水源的转接器或铜接头，并可配套塑料喷枪等实用工具。



INTRODUCTION

1. PVC garden hose is made of the latest PVC material, reinforced by polyester fiber reinforcement. It's flexible, durable, light, colorful and ease of use. And by using of the latest summer formula, it can effectively resist UV and aging.
2. It can be made into multiple layers; It can also be made into crocheting garden hose, which can effectively resist kinking.
3. It can be equipped with adapters or copper fittings connected to water faucets, and also can be equipped with practical tools such as plastic spray guns.

用途:

PVC花园管用于输水、园艺、清洁、一般排水;被广泛用于花园、高尔夫球场、公路等各种户外场所。

APPLICATIONS

PVC garden hose is used for conveying water, gardening, cleaning and general water discharge; It is widely used in gardens, golf courses, highways and other outdoor places.



花园管产品图片

PVC Garden Hose Photos



PVC花园管规格表

PVC Garden Hose Specification

产品编号 Item No.	英寸 inch	内径 I.D. (mm)	外径 O.D. (mm)	工作压力 W.P Bar at 23°C	爆破压力 B.P Bar at 23°C	长度 length/roll (meter)	米重 weight/meter (kg)
PGH001	1/4	6	10	8	24	100	0.068
PGH002		6	11	8	24	100	0.09
PGH003	3/8	10	14	8	24	100	0.102
PGH004		10	15	8	24	100	0.132
PGH005	1/2	12	16	8	24	100	0.119
PGH006		13	18	8	24	100	0.164
PGH007	5/8	16	21	7	21	50	0.196
PGH008	3/4	19	24	5	15	50	0.228
PGH009		19	25	5	15	50	0.28
PGH010	1	25	30	4	12	50	0.291
PGH011		25	31	4	12	50	0.355



PVC纤维增强管 PVC FIBER REINFORCED HOSE

产品概述

1、PVC纤维增强软管是由高韧性PVC材料和增强涤纶线制成。本产品柔软轻便、透明、耐用。透明的PVC材料无毒，耐化学品，能够确保转移物质的安全性和完整性。

2、可采用钩编方式制成钩编管，抗扭曲，更耐用。

3、可在管体表面增加彩色标志线。

工作温度: $-10^{\circ}\text{C}-65^{\circ}\text{C}$



INTRODUCTION

1. PVC fiber reinforced hose is made of high toughness PVC material and reinforced polyester fiber. It is flexible, transparent, and durable. The clear PVC material is no-toxic and resistant to chemicals, ensuring the safety and integrity of transferred substances.

2. Can be made into crocheting fiber hose, it can be anti-kink, more durable.

3. Color marking line can be added on the surface of the hose body.

Working Temperature: $-10^{\circ}\text{C}-65^{\circ}\text{C}$


用途:

PVC纤维增强软管可广泛应用于中等压力要求的环境，如空气，水，稀酸和油。普遍应用于园艺、灌溉和一般排水。



APPLICATIONS

The PVC fiber reinforced hose can be used for medium pressure applications such as air, water, dilute acids and oils. It is widely used in gardening, irrigation, and general water discharge.

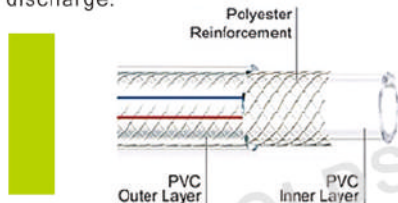

PVC纤维增强软管规格表


PVC Fiber Reinforced Hose Specification

产品编号 Item No.	英寸 inch	内径 I.D. (mm)	外径 O.D. (mm)	工作压力 W.P Bar at 23°C	爆破压力 B.P Bar at 23°C	长度 length/roll (meter)	米重 weight/meter (kg)
PFRH001	1/5	5	9	10	30	100	0.059
PFRH002	1/4	6	10	8	24	100	0.068
PFRH003		6	11	9	27	100	0.09
PFRH004	5/16	6	12	10	30	100	0.114
PFRH005		8	12	8	24	100	0.085
PFRH006		8	13	10	30	100	0.111
PFRH007		8	14	12	36	100	0.14
PFRH008	3/8	9	13	8	24	100	0.093
PFRH009		9	14	10	30	100	0.122
PFRH010		10	14	8	24	100	0.102
PFRH011		10	15	8	24	100	0.132
PFRH012	1/2	10	16	10	30	100	0.165
PFRH013		12	16	6	18	100	0.119
PFRH014		12	17	7	21	100	0.154
PFRH015		12	18	9	27	100	0.191
PFRH016		13	17	6	18	100	0.127
PFRH017		13	18	6	18	100	0.164
PFRH018	5/8	13	19	7	21	100	0.203
PFRH019		15	19	6	18	100	0.144
PFRH020		15	20	7	21	100	0.186
PFRH021		15	21	8	24	100	0.229
PFRH022		16	20	6	18	100	0.153
PFRH023		16	21	6	18	100	0.196
PFRH024		16	22	6	18	100	0.242
PFRH025		3/4	19	23	5	15	50/100
PFRH026	19		24	5	15	50/100	0.228
PFRH027	19		25	5	15	50/100	0.28
PFRH028	19		26	5	15	50/100	0.334
PFRH029	20		25	5	15	50/100	0.238
PFRH030	20		26	5	15	50/100	0.292
PFRH031	1	20	27	5	15	50/100	0.349
PFRH032		25	30	5	15	50	0.291
PFRH033		25	31	5	15	50	0.356
PFRH034		25	32	5	15	50	0.423
PFRH035	1-1/4	32	39	5	15	50	0.527
PFRH036		32	40	5	15	50	0.61
PFRH037		32	41	5	15	50	0.696
PFRH038	1-1/2	38	45	5	15	50	0.616
PFRH039		38	46	5	15	50	0.712
PFRH040		38	47	5	15	50	0.811
PFRH041	1-3/4	45	55	5	15	50	1.06
PFRH042	2	50	60	4	12	40	1.166
PFRH043		50	62	4	12	40	1.424
PFRH044		64	78	4	12	40	2.107

PVC 钢丝管 PVC STEEL WIRE HOSE

产品概述

- 1、PVC 钢丝软管由全新 PVC 原料制成，镀锌钢丝加固，使其具有抗压性能。该产品具有耐化学、耐臭氧、耐燃、自熄性，弯曲半径小等特点。
- 2、钢丝管分为三个等级：食品级，工业级，农业级。
- 3、可植入铜线，防止静电；也可增加涤纶纤维编织层，工作压力更高。
- 4、可在管面增加彩色标志线，更加美观。

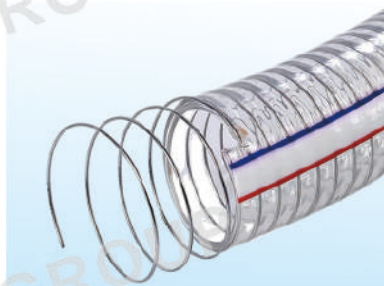

INTRODUCTION

1. PVC Steel Wire Hose is made of new PVC raw material with galvanized steel wire reinforcement to make it negative pressure resistance. It's chemical, ozone, and flame resistant as well as self-extinguishing, with small bending radius.
2. PVC steel wire hose is divided into three grades: food grade, industrial grade, agricultural grade.
3. Built-in copper wire can avoid blockage of the internal flow caused by the static electricity; and it can also be added polyester fiber reinforcement, its working pressure will be higher.
4. Color marking line can be added to the hose surface to make it more beautiful.

用途:

PVC 钢丝软管通常用于输水、吸水或排水的场合。其广泛应用于工厂、农业、工程、卫生等管道的水、油、粉的吸排。



APPLICATIONS

PVC steel wire hose is usually used for water transmission, suction or drainage occasions. It is widely used for suction and discharge of water, oil, and powder in the factory, agriculture, engineering, and sanitary plumbing.



PVC钢丝管规格表

PVC Steel Wire Hose Specification

产品编号 Item No.	英寸 Inch	内径I.D. (mm)	外径O.D. (mm)	工作压力 W.P Bar at 23°C	爆破压力 B.P Bar at 23°C	长度 length/roll (meter)	米重 weight/meter (kg)
PSWH001	1/2	12	18	6	18	50	0.2
PSWH002		13	19	6	18	50	0.23
PSWH003	5/8	15	20	5	15	50	0.2
PSWH004		16	20	5	15	50	0.18
PSWH006		16	23	5	15	50	0.3
PSWH007	3/4	19	23	5	15	50	0.21
PSWH008		19	24	5	15	50	0.26
PSWH009		19	26	5	15	50	0.4
PSWH010	1	25	31	5	15	50	0.45
PSWH011		25	32	5	15	50	0.5
PSWH012		25	33	5	15	50	0.55
PSWH013		25	34	5	15	50	0.6
PSWH014		32	38	5	15	50	0.5
PSWH015	1-1/4	32	39	5	15	50	0.6
PSWH016		32	40	5	15	50	0.7
PSWH017	1-1/2	38	44	4	12	50	0.6
PSWH018		38	45	4	12	50	0.7
PSWH019		38	46	4	12	50	0.8
PSWH020	1-3/4	45	53	4	12	50	1
PSWH021		45	54	4	12	50	1.1
PSWH022	2	50	57	4	12	50	1
PSWH023		50	58	4	12	50	1.2
PSWH024		50	60	4	12	50	1.4
PSWH025		50	62	4	12	50	1.6
PSWH026	2-1/2	64	72	4	12	30	1.5
PSWH027		64	73	4	12	30	1.65
PSWH028		64	74	4	12	30	1.8
PSWH029	3	75	85	4	12	30	2
PSWH030		75	86	4	12	30	2.2
PSWH032		75	87	4	12	30	2.3
PSWH033		75	88	4	12	30	2.5
PSWH034	4	102	112	4	12	30	3
PSWH035		102	114	4	12	30	3.5
PSWH036		102	116	4	12	30	4
PSWH037		102	118	4	12	30	4.5
PSWH038	5	127	143	3	9	20	6
PSWH039	6	152	166	3	9	20	6.5
PSWH040	8	200	224	3	9	10	12

PVC塑筋管

PVC SUCTION HOSE

产品概述

- 1、PVC塑筋管由PVC原料制成，采用螺旋PVC加固，具有耐用性、灵活性、耐磨性、化学性和耐候性。PVC增强筋具有一定的硬度以保证管体的结构强度，防止在真空或吸力下扁塌。
- 2、塑筋管外壁分为平筋和凸筋。
- 3、可选配快速接头，鲍尔接头，双耳接头等各种接头以适用于各种使用场景。



INTRODUCTION

1. PVC suction hose is made of PVC raw material, reinforced by spiral PVC. It is durable, flexible, wear-resistance, chemical-resistance and weather-resistance. PVC spiral reinforcement has a certain hardness to ensure the structural strength of the hose body and prevent collapsing under vacuum or suction.
2. Two types for the outer layer of suction hose: smooth and corrugated.
3. It can be equipped with quick connectors, Bauer couplings double ear connectors and other kind of connectors for various usage scenarios.

用途:

PVC塑筋管是一种专门为吸入应用而设计的软管，用于抽吸流体、液体，粉末或者其他材料。通常用于各种行业的灌溉、脱水、排水、抽水和液体转移等任务，还可设计专门用于水疗、池塘、喷砂或吸油等。

APPLICATIONS

PVC suction hose is specially designed for suction applications, used to suction fluids, liquids, powders or other materials. Commonly used for irrigation, dehydration, drainage, and liquid transfer tasks in a variety of industries, and it can also be designed specifically for hydrotherapy, pond, sandblasting or gasoline suction.



PVC塑筋管规格表

PVC Suction Hose Specification

产品编号 Item No.	英寸 Inch	内径I.D. (mm)	外径O.D. (mm)	厚度 Thickness (mm)	米重 weight/meter (kg)	工作压力 W.P Bar at 23°C	长度 length/roll (meter)
PSH001	1/2	13.5	17.5	2	0.12	-1~7	30
PSH002			18.5	2.5	0.15	-1~7	30
PSH003			19.5	3	0.18	-1~7	30
PSH004			20.5	3.5	0.22	-1~7	30
PSH005	5/8	16	22	3.0	0.24	-1~7	30
PSH006	3/4	19	23	2	0.18	-1~7	30
PSH007			24	2.5	0.23	-1~7	30
PSH008			25	3	0.28	-1~7	30
PSH009			26	3.5	0.32	-1~7	30
PSH010	1	25	29	2	0.23	-1~7	30
PSH011			30	2.5	0.29	-1~7	30
PSH012			31	3	0.35	-1~7	30
PSH013			32	3.5	0.41	-1~7	30
PSH014	1.2	30	35	2.5	0.35	-1~7	30
PSH015			36	3	0.42	-1~7	30
PSH016			37	3.5	0.5	-1~7	30
PSH017			38	4	0.56	-1~7	30
PSH018	1.26	32	37	2.5	0.38	-1~7	30
PSH019			38	3	0.46	-1~7	30
PSH020			39	3.5	0.55	-1~7	30
PSH021			40	4	0.62	-1~7	30
PSH022	1.5	38	43	2.5	0.44	-1~7	30
PSH023			44	3	0.53	-1~7	30
PSH024			45	3.5	0.62	-1~7	30
PSH025			46	4	0.71	-1~7	30
PSH026	1.7	43	47	3.5	0.65	-1~7	30
PSH027			48	2.5	0.5	-1~7	30
PSH028			49	3	0.61	-1~7	30
PSH029			50	3.5	0.7	-1~7	30
PSH030	2	50	51	4	0.8	-1~7	30
PSH031			56	3	0.7	-1~7	30
PSH032			57	3.5	0.82	-1~7	30
PSH033			58	4	0.95	-1~7	30
PSH034	2.5	63	59	4.5	1.1	-1~7	30
PSH035			61	4.5	1.1	-1~7	30
PSH036			69	3	0.88	-1~7	30
PSH037			70	3.5	1.04	-1~7	30
PSH038	3	75	71	4	1.19	-1~7	30
PSH039			72	4.5	1.38	-1~7	30
PSH040			82	3.5	1.2	-1~7	30
PSH041			83	4	1.38	-1~7	30
PSH042	3.5	88	84	4.5	1.56	-1~7	30
PSH043			85	5	1.8	-1~7	30
PSH044			95	3.5	1.32	-1~7	30
PSH045			96	4	1.52	-1~7	30
PSH046	3.5	88	97	4.5	1.71	-1~7	30
PSH047			98	5	2	-1~7	30

PVC塑筋管规格表

PVC Suction Hose Specification

产品编号 Item No.	英寸 Inch	内径I.D. (mm)	外径O.D. (mm)	厚度 Thickness (mm)	米重 weight/meter (kg)	工作压力 W.P Bar at 23°C	长度 length/roll (meter)
PSH048	4	100	108	4	1.66	-1-7	30
PSH049			109	4.5	1.88	-1-7	30
PSH050			110	5	2.09	-1-7	30
PSH051	4.5	113	111	5.5	2.3	-1-7	30
PSH052			121	4	1.83	-1-7	30
PSH053			122	4.5	2.06	-1-7	30
PSH054			123	5	2.38	-1-7	30
PSH055			124	5.5	2.8	-1-7	30
PSH056	5	125	134	4.5	2.59	-1-7	20
PSH057			135	5	2.88	-1-7	20
PSH058			136	5.5	3.18	-1-7	20
PSH059			137	6	3.5	-1-7	20
PSH060	6	150	160	5	3.5	-1-7	20
PSH061			162	6	4.1	-1-7	20
PSH062			164	7	4.79	-1-7	20
PSH063			166	8	5.5	-1-7	20
PSH064	8	200	212	6	5.1	-1-7	20
PSH065			214	7	5.9	-1-7	20
PSH066			216	8	6.8	-1-7	20
PSH067			218	9	7.58	-1-7	20

产品包装 - Package



应用场景 - Application



塑筋管种类

Types Of PVC Suction Hose



纤维增强PVC塑筋管规格表

PVC Fiber Reinforced Suction Hose Specification

产品编号 Item No.	英寸 Inch	内径 I.D. (mm)	外径 O.D. (mm)	米重 weight/meter (kg)	最小弯曲半径 bend radius (meter)	爆破压力 B.P. (bar)	负压 Negative Pressure (Mpa)
PFSH001	2	50 ± 1	62	1.1	0.5	19	0.097
PFSH002	2.5	65 ± 1	77	1.50	0.60	15	0.097
PFSH003	3	75 ± 1	90	1.8	0.65	12	0.097
PFSH004	4	101 ± 1.5	119	2.70	0.85	9	0.097
PFSH005	6	151.5 ± 1.5	174	5.7	1.5	7	0.097
PFSH006	8	201 ± 1.5	224	8.0	1.9	5	0.097



埋吸管 RUBBER SUCTION HOSE

产品概述

- 1、埋吸管内采用合成树脂材料，表面耐磨。全新材料的螺旋钢丝外加尼龙织布确保埋吸管耐寒耐高压性。织布缠绕的橡胶外管使得埋吸管具有耐油耐磨损的特性。
- 2、管外层具有平面纹和波面纹两种选择。
- 3、可提供配套使用的布尔接头，法兰等其他配件产品。

工作温度：-35℃至80℃

INTRODUCTION

1. The abrasion & aging resistant synthetic rubber making inner tube and cover, together with the high tensile nylon woven fabric and helix wire embedded reinforcement making the rubber suction hose wear-resisting, cold-resistant & resistant to high pressure.
2. Two types for the outer layer of the hose: smooth and wave surface.
3. Providing matching Bauer couplings, flanges and other accessories.

Working Temperature: -35℃-80℃




用途:

根据用途不同，用于吸排水，泥浆，粉末，石油类产品、柴油、汽油、润滑油、燃料等。

APPLICATIONS

According to different purposes, it is used for suction and draining of mud, powder, petroleum products, diesel, gasoline, lubricating oil, fuel, etc.

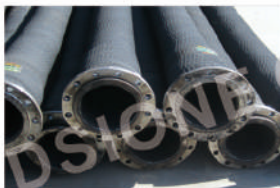

橡胶埋吸管规格表

Rubber Suction Hose Specification

产品编号 Item No.	内径 I.D.		外径 O.D.	工作压力 W.P		负压 Vacuum	最大长度 L	
	Inch	mm	mm	bar	psi	bar	m	ft
RSH001	3/4	19.1	31	10	150	0.8	61	200
RSH002	3/4	19.1	32	20	300	0.8	61	200
RSH003	1	25.4	37	10	150	0.8	61	200
RSH004	1	25.4	37	20	300	0.8	61	200
RSH005	1-1/2	38.1	51	10	150	0.8	61	200
RSH006	1-1/2	38.1	54	20	300	0.8	61	200
RSH007	1-1/4	31.8	44	10	150	0.8	61	200
RSH008	1-1/4	31.8	47	20	300	0.8	61	200
RSH009	2	50.8	64	10	150	0.8	61	200
RSH010	2	50.8	67	20	300	0.8	61	200
RSH011	2	50.8	67	27.6	400	0.8	61	200
RSH012	2-1/2	63.5	76	10	150	0.8	61	200
RSH013	2-1/2	63.5	80	20	300	0.8	61	200
RSH014	2-1/2	63.5	80	27.6	400	0.8	61	200
RSH015	3	76.2	91	10	150	0.8	61	200
RSH016	3	76.2	92	20	300	0.8	61	200
RSH017	3	76.2	92	27.6	400	0.8	61	200
RSH018	3-1/2	88.9	107	10	150	0.8	61	200
RSH019	3-1/2	88.9	110	20	300	0.8	61	200
RSH020	3-1/2	88.9	110	27.6	400	0.8	61	200
RSH021	4	101.6	120	10	150	0.8	61	200
RSH022	4	101.6	122	20	300	0.8	61	200
RSH023	4	101.6	122	27.6	400	0.8	61	200
RSH024	5	127	147	10	150	0.8	30.6	100
RSH025	5	127	153	20	300	0.8	30.5	100
RSH026	6	152.4	172	10	150	0.8	30.5	100
RSH027	6	152.4	176	20	300	0.8	30.5	100
RSH028	8	203.2	229	10	150	0.8	30.5	100
RSH029	8	203.2	228	20	300	0.8	30.5	100
RSH030	10	254	282	10	150	0.8	11.8	39
RSH031	10	254	288	20	300	0.8	11.8	39
RSH032	12	304.8	329	10	150	0.8	11.8	39
RSH033	12	304.8	340	20	300	0.8	11.8	39

橡胶空气管/水管/砂管/暖风管/双联管

RUBBER AIR/WATER/SANDBLAST/HEATER/WELDING HOSE

产品概述

管体: 耐磨橡胶/EPDM胶/SBR/NBR胶

加强层: 根据用途加线或者不加线

外层: 根据用途使用耐磨胶, EPDM胶, SBR 或NBR

产品特点: 本产品耐磨、耐候性好。具有耐压、柔韧、重量轻、抗弯曲、变形小、表面光滑等特点。



INTRODUCTION

Tube: NBR & SBR synthetic rubber; black color.

Reinforcement: High tensile synthetic yarn, single/double yarn braided or spiraled.

Cover: NBR & SBR synthetic rubber; black, red, yellow and etc.

Characteristics: Abrasion resistant, weather resistant. It's of pressure bearable, flexible, light in weight, anti-bending, less distortion and nice smooth surface.

尺寸 Measurement (Inch)	内径 I.D. (mm)	外径 O.D. (mm)	编织层数 Weave layer (B)	工作压力 W.P. (MPa)	爆破压力 B.P. (MPa)	标准长度 Fixed length (meter)
3/16	5	12	1	1.5 ~ 2.0	4.5 ~ 6.0	100
1/4	6	13	1	1.5 ~ 2.0	4.5 ~ 6.0	100
5/16	8	15	1	1.5 ~ 2.0	4.5 ~ 6.0	100
3/8	10	17	1	1.5 ~ 2.0	4.5 ~ 6.0	100
1/2	13	21	2	1.5 ~ 2.0	4.5 ~ 6.0	100
5/8	16	25	2	1.5 ~ 2.0	4.5 ~ 6.0	100
3/4	19	29	2	1.5 ~ 2.0	4.5 ~ 6.0	50
1	25	36	2	1.5 ~ 2.0	4.5 ~ 6.0	50
1-1/4	32	42	2	1	3	30
1-1/2	38	51	2	1	3	30
2	51	65	2	1	3	30

用途:

可用于工业清洗, 电焊, 抛光, 输送暖风, 输送水或者气体, 也可做成双联管应用于气焊。

APPLICATIONS

It can be used for industrial cleaning, welding, polishing, conveying warm air, conveying water or gas, and can also be made into double tubes for gas welding.



PVC 一步法水带生产线

PVC LAY FLAT HOSE PRODUCTION LINE



机组特点

PVC一步法水带生产线是由我公司吸收消化国外先进技术而自行研制的新产品，它生产以涤纶纤维为增强材料，经特殊工艺，与由挤出机塑化挤出的PVC物料结合一次成型的软管。该生产线生产的软管具有柔韧性好、耐高压、抗腐蚀、耐老化、重量轻、无限长等优点。

INTRODUCTION

PVC one-step molding lay flat hose production line is a new product developed by our company to absorb and digest foreign advanced technology. This production line produces the soft hose which is one-step molding hose, which means the polyester fiber as the reinforcing material combined together immediately when the PVC material plasticized and extruded by the extruder. The hoses produced by the line have the characteristics of good flexibility, high pressure resistance, corrosion resistance, aging resistance, light weight, no limitation in length, etc.

型号 Model	螺杆直径 Screw Diameter (MM)	长径比 L/RS	材质 Material	主机功率 Main Motor Power (Kw)	中心高 Center High (MM)	生产范围 Scope of Product (MM)	安装尺寸 Installation Dimension (LxWxH-MM)
SJ-55	Φ55	30/1	38CrMnAl	11	1100	Φ25-Φ40	15000x6000x2000
SJ-75	Φ75	30/1	38CrMnAl	18.5	1100	Φ50-Φ102	16000x6500x2000
SJ-90	Φ90	30/1	38CrMnAl	37	1100	Φ102-Φ152	18000x7000x2000
SJ-120	Φ120	30/1	38CrMnAl	45	1100	Φ200-Φ304	22000x8000x2000

PVC纤维增强软管生产线

PVC FIBER REINFORCED HOSE PRODUCTION LINE



机组特点

本生产线生产PVC纤维增强软管。该管又称PVC网格管，俗称塑料蛇皮管，适用于有压或有腐蚀性的气体、液体的输送，广泛应用在机械、煤矿、石油、化工、农灌、建筑、民用（太阳能热水器、煤气罐）等领域。现亦大量应用于花园、草坪的浇灌。

INTRODUCTION

This line is designed to produce PVC fiber reinforced hose, the wall of which is three layers, outer and inner layer are soft PVC, and the middle layer is fiber reinforcement. This kind of hose has good chemical and physical property. And the hose is suitable for the transportation of medium pressure or corrosive gas and liquid, and widely used in the machinery, coal mine, petroleum, chemical engineering, agriculture irrigation and construction, etc.



型号 Model	螺杆直径 Screw Diameter (MM)	主机功率 Main Motor Power (Kw)	生产范围 Scope of Product (MM)	安装尺寸 Installation Diemension (LxWxH-MM)
SJ55 × 2	Φ55	7.5x2	Φ8-25	15000 × 4000 × 2000
SJ65 × 2	Φ65	15x2	Φ8-50	18000 × 5000 × 2000

PVC塑筋管生产线

PVC SUCTION HOSE PRODUCTION LINE



机组特点

该生产线为PVC螺旋增强软管的专业机组，有两台挤出机，成型机，水槽和收卷机组成。管壁有软PVC和硬PVC螺旋来加强压力，该管具有耐挤压、耐腐蚀、耐负压、抗弯曲、流通性好等特点，适用于气体、液体、粉粒状物的输送，广泛应用于工业、农业、建筑和水利灌溉等领域。

INTRODUCTION

This production line is designed to produce PVC suction hose; it consists two extruders, forming unit, bath, and winder. The wall of suction hose is soft PVC and rigid PVC helix as reinforced, featuring extrusion resistance, corrosion resistance, negative pressure resistance, anti-bending, good flowability. So this kind of hose is suitable to conveying gas, liquid and powder, widely used in industry, agriculture, construction and irrigation, etc.

型号 Model	螺杆直径 Screw Diameter (MM)	生产范围 Scope of Product (MM)	主机功率 Main Motor Power (Kw)	安装尺寸 Installation Dimension (LxWxH-MM)
SJ45	Φ45	Φ12-50	18.5	35000 x 4000x2000
SJ55	Φ55	Φ19-65	22	35000 x 4500x2000
SJ65	Φ65	Φ50-120	37	35000 x 5000 x 2000
SJ90	Φ90	Φ125-305	45	35000 x 6000 x 2000

PVC钢丝管生产设备

PVC STEEL WIRE HOSE PRODUCTION LINE



机组特点

本生产线适用于生产PVC钢丝增强软管。管壁为PVC透明软质塑料，其内为螺旋钢丝，具有耐挤压，耐腐蚀、抗静电、抗高压、流通性好等特点，适用于高压和易燃气体、液体的输送，以及液体杂质的重吸和输送。主要用于机械、化工、建筑、农业灌溉和真空设备等。

INTRODUCTION

The line is used to produce PVC steel wire reinforced transparent hose. The hose wall is made of transparent PVC plastics, and the spiral steel wire embedded in the PVC material. This kind of hose has the advantages of extrusion resistance, corrosion resistance, static electricity resistance, anti-high pressure and stable operation. It is suitable for conveying high pressure or combustible gas and liquid, heavy suction and delivery of liquid sludge. It is mainly used in machinery industry, building, irrigation and vacuum pump, etc.

型号 Model	螺杆直径 Screw Diameter (MM)	长径比 L/RS	材质 Material	主机功率 Main Motor Power (Kw)	中心高 Center Height (MM)	生产范围 Scope of Product (MM)	安装尺寸 Installation Diemension (LxWxH-MM)
SJ-45	Φ45	30/1	38CrMnAl	11	1100	Φ12-Φ25	14000x5000x2000
SJ-65	Φ65	30/1	38CrMnAl	15	1100	Φ25-Φ50	14000x5000x2000
SJ-75	Φ75	30/1	38CrMnAl	18.5	1100	Φ25-Φ75	15000x5000x2000
SJ-90	Φ90	30/1	38CrMnAl	30	1100	Φ64-Φ152	16000x6000x2000

PVC造粒机

PVC GRANULATING PRODUCTION LINE



机组特点

造粒机采用变频调速控制，铸铝加热器，单螺旋结构，电子温控仪表，具有运行稳定，产量高，切粒均匀等特点。适用于塑料制品厂家PVC原料的热切造粒。

INTRODUCTION

This line adopts the variable frequency speed control granulator, aluminum heater, single spiral structure, electronic temperature control instrument, has characteristics of of stable operation, high output, and even granule-cutting etc. It is suitable for the plastic products manufacturer of hot cutting granulation of PVC materials.

型号 Model	螺杆直径 Screw Diameter (MM)	主机功率 Main Motor Power (Kw)	安装尺寸 Installation Dimension (LxWxH-MM)	产能 Output (kg/h)
S90	Φ90	30	5000x5000x2500	160
S120	Φ120	37	8000x8000x2500	260-300

GOLDSIONE GROUP

GOLDSIONE GROUP

GOLDSIONE GROUP

地址：山东省潍坊市昌乐县南郝工业园内
电话：0086-536-2181073
邮箱：sales@goldsione.com
<http://www.goldsione.com>

Add: A908 Lanbao Business Mansion,
Changle county, Weifang city,
Shandong province, China

Tel: 0086-536-2181073
E-mail: sales@goldsione.com
<http://www.goldsione.com>



WeChat